



**Solar**  
**GERMAN**  
**NATIONAL**

# Mercury Series

## Mono-Crystalline 700-720W

0~+5W POWER TOLERANCE

High efficiency N - type double glass solar module

Stronger properties, PID resistance, reduced hot spot loss ●

Higher module power, lower BOS costs ●

Harsh environmental adaptation ●

Bifacial module, more power generation ●

15 years material warranty **15**

30 years power linear warranty **30**

**132**

HALF-CUT  
CELLS

**210**  
x210  
mm

SQUARE  
CELLS

Comprehensive quality management system  
and product certification

IEC61215(2016), IEC61730(2016)

ISO9001:2015: Quality management system

ISO14001:2015: Environmental management system

ISO45001:2018: Occupational health and safety management system




**23.2%**  
MAXIMUM CONVERSION

**0~+5W**  
POWER TOLERANCE

**0.4%**  
0.4% PER YEAR OVER 2-30 YEARS

**Half-Cut Module**  
LOWER TEMPERATURE COEFFICIENT

## Mechanical Diagrams

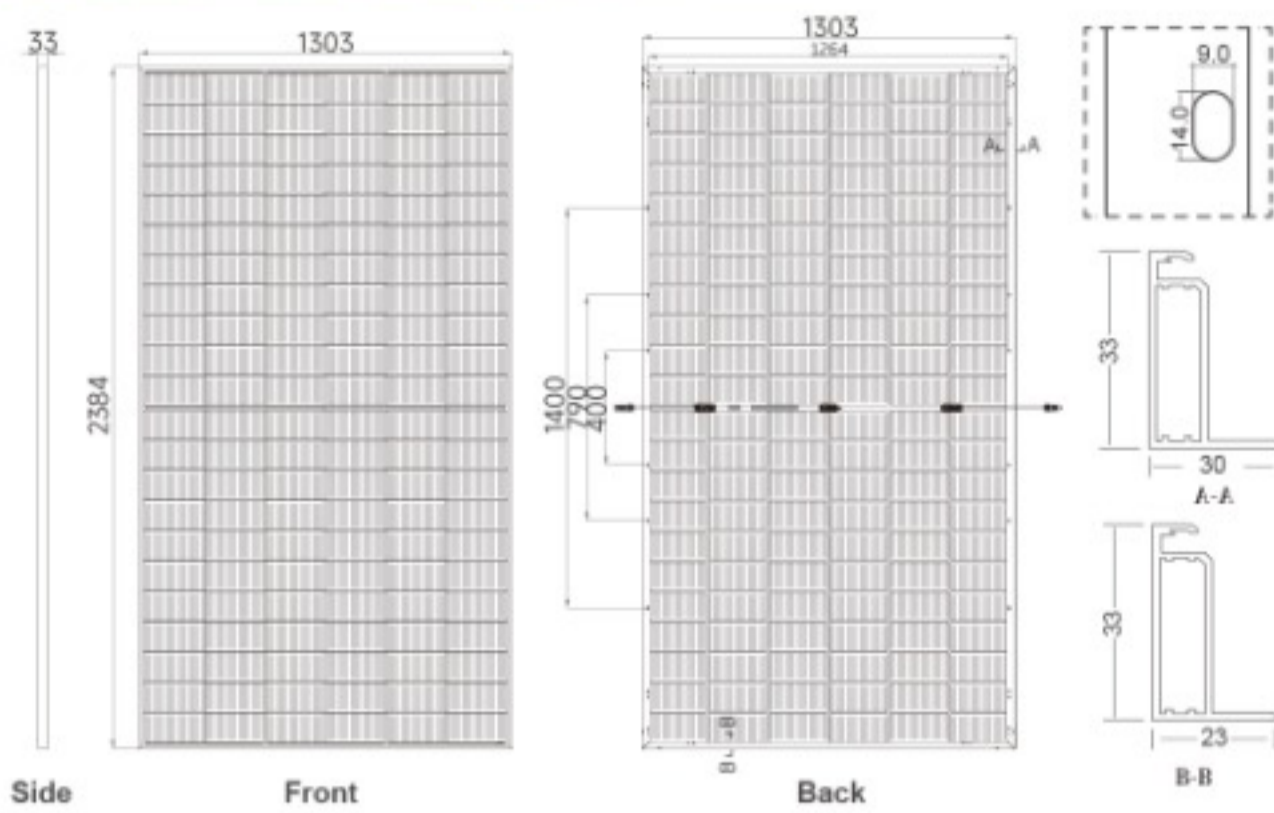

Length: ±2mm Width: ±2mm Thickness: ±1mm Hole pitch: ±2mm

## Packing Standard

Container capacity(40HQ)

Pallet size (mm) : 34pcs/pallet, 18pallets/ctns, 612pcs/ctn

## Electrical Parameters At BNPI

Maximum Power (Pmax)	772	777	783	789	795
Open Circuit Voltage (Voc)	48.13	48.32	48.51	48.68	48.86
Short Circuit Current (Isc135)	20.30	20.36	20.43	20.49	20.55
Maximum Power Voltage (Vmp)	40.44	40.61	40.78	40.95	41.12
Maximum Power Current (Imp)	19.09	19.14	19.20	19.25	19.30
Short Circuit Current (Isc300)	22.61	22.68	22.75	22.82	22.89

## Electrical Parameters

Module Type	QN-700HT-01		QN-705HT-01		QN-710HT-01		QN-715HT-01		QN-720HT-01	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax)	700	529	705	533	710	537	715	541	720	544
Open Circuit Voltage (Voc)	48.13	45.73	48.32	45.91	48.51	46.08	48.60	46.17	48.69	46.26
Short Circuit Current (Isc)	18.41	14.73	18.47	14.77	18.52	14.82	18.58	14.87	18.64	14.91
Maximum Power Voltage (Vmp)	40.44	38.22	40.61	38.38	40.78	38.54	40.95	38.70	41.12	38.86
Maximum Power Current (Imp)	17.31	13.85	17.36	13.89	17.41	13.93	17.46	13.97	17.51	14.01
Module Efficiency -ηm (%)	22.5		22.7		22.9		23.0		23.2	


## Load Capacity

Max Load Front	5400Pa
Max Load Back	2400Pa
Through Hail Testing	25mm Diameter, Impact Speed 23m/s

## Temperature Coefficient (STC Test)


Temperature Coefficient of Isc	+0.04%/°C
Temperature Coefficient of Voc	-0.25%/°C
Temperature Coefficient of Pmax	-0.30%/°C

## Curve Figure

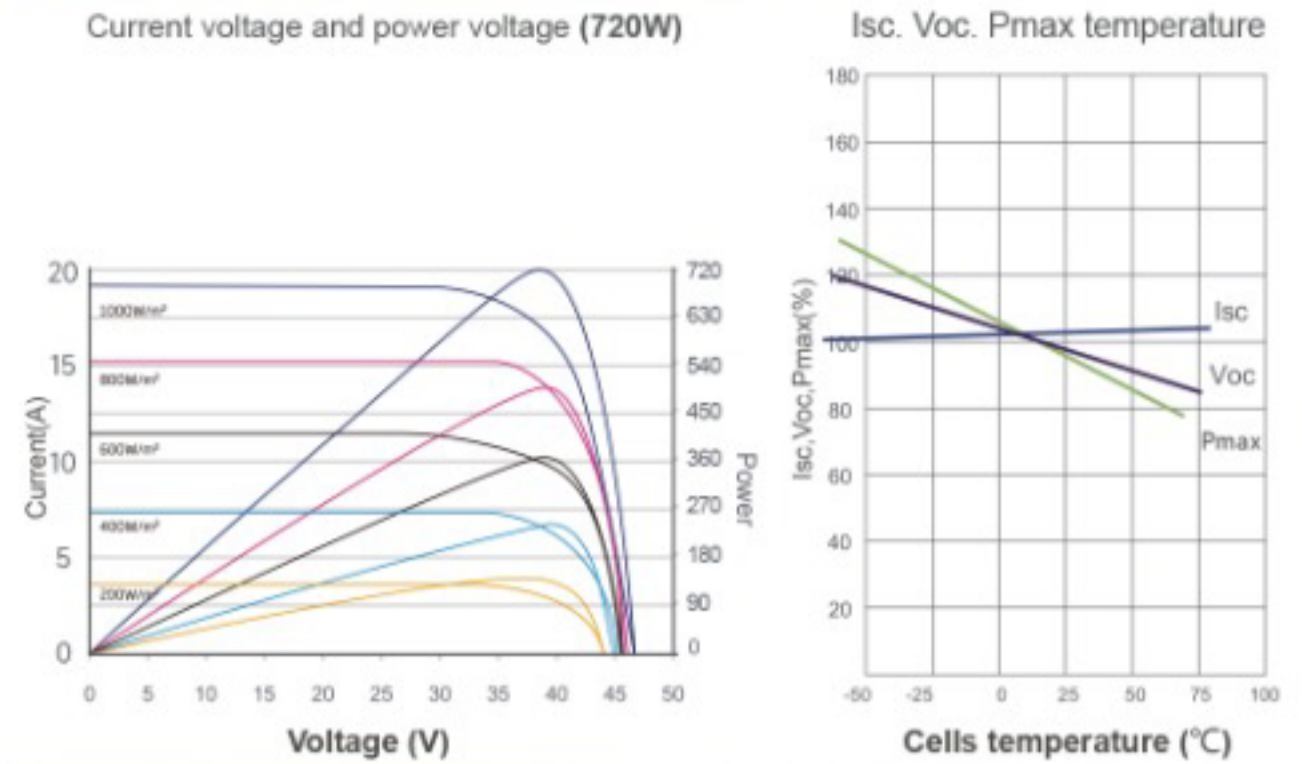

## Specification

Cell Type	Mono Crystalline
No. of Cells	132[2x(6x11)] pcs
Dimension	2384x1303x33mm
Weight	37.8kg
Front Glass	2.0mm
Back Glass	2.0mm
Junction Box	IP68
Cable Length	300mm,1200mm(can be customized)

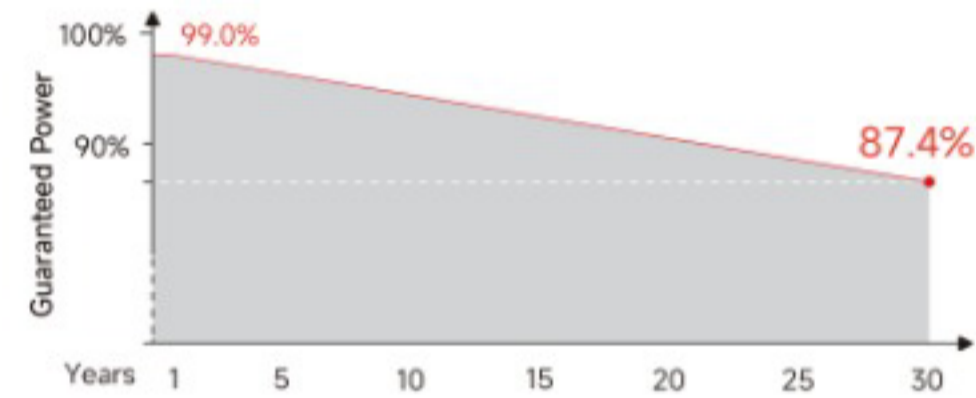

## Operation Parameters

Operational Temperature	-40°C~+85°C
Maximum System Voltage	1500VDC (IEC)
Maximum Series Fuse Rating	35A
Power Tolerance	0~+5W
Nominal Operating Cell Temperature (NOCT)	42±2°C
Safety Class	class I
Refer.Bifacial Factor	80±10%

STC : Irradiance:1000W/m<sup>2</sup> | Battery temperature: 25°C | Atmospheric=1.5

NOCT: Irradiance:800W/m<sup>2</sup> | Ambient temperature: 20°C | Atmospheric=1.5 | Wind speed 1m/s

BNPI: Rear Irradiance 135W/m<sup>2</sup> | Bifaciality coefficient 80%±5%

Add: Hengsener str.8 44309

Dortmund Germant

<https://www.info@germannational.de>